

- ✓ "Walk-around" pit layout saves time spent raising and lowering lift
- ✓ 18,000-lb. (8165 kg) capacity and 22.5-in. (572 mm) runway width
- **✓** Two available runway lengths: 223- and 255-in.



Specifications

All models have 50 mm turnplate pockets and 4-wheel align WB 88 in. - 158 in.

Model	Length	Description
P441J	223 in. (5664 mm)	Pit Rack with (2) 9,000-lb. (4082 kg) Swing Air Jacks
P441-IS	223 in. (5664 mm)	Pit Rack with Inflation Station and (2) 9,000-lb. (4082 kg) Swing Air Jacks
P444J	255 in. (6477 mm)	Pit Rack with (2) 9,000-lb. (4082 kg) Swing Air Jacks
P444-IS	255 in. (6477 mm)	Pit Rack with Inflation Station and (2) 9,000-lb. (4082 kg) Swing Air Jacks

Standard



Swing Air Jack – 133-84-1 9,000-lb. (4082 kg) Capacity



Air Line KitProvides a convenient air source at the front and rear for jacks and air tools.

Optional




Integrated Inflation Reels (-IS models)Automatically fills or bleeds each tire.



Stainless Steel Turnplate - 20-2532-1

20-2076-1 PowerSlide turnplates20-2533-1 Low-friction stainless steel turnplates

Site Requirements*

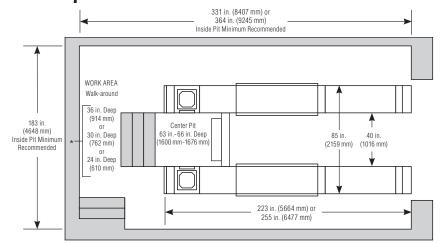

For complete site requirements see 6114-T

For P441 blueprint order 6120-T

For P444 blueprint order 6121-T

* When ordering, 36 in. deep work area is standard. See blueprint for parts to order when selecting 24 in. or 30 in. work area.

