

- **✓** The only Mercedes-Benz approved alignment rack for Sprinter
- **✓** Easily and safely service vehicles up to 18,000 lbs.
- **✓** Patented features maximize productivity



4PMB Specifications

Max. vehicle weight 18,000 lbs. (8164 kg)

193" (4902 mm) Max. wheelbase General service 177" (4496 mm) 2-wheel alignment

> 4-wheel alignment 177" (4496 mm) 85.5" (2172 mm)

Min. 4-wheel alignment Max. lifting height 75" (1905 mm) Alignment height Minimum height Overall height

Any of 16 lock positions 8 3/4" (222 mm) 98" (2489 mm)

Tread width Min. inside 40" (1016 mm) Max. outside 85" (2159 mm)

3 hp, 208-230 VAC, 60 Hz, 1 ph Motor Air 80-125 psi

Models:

4PMB MKS 4-Post with one jack

4PMB-PS MKS 4-Post with two jacks and PowerSlide slip plates

4PMB-IS MKS 4-Post with two jack and FIA, InflationStation, and PowerSlide

Options:

20-2336-1 Low-friction PowerSlide turnplates

20-2113-1 Low friction 50 mm turnplates (non-powerslide)


20-2377-1 Rack lighting kit

20-2033-1 40" Ramp Extension Kit (for extremely low clearance


vehicles or high floor slope situation)

133-83-1 9,000-lb. (3175 kg) capacity Swing Air Jack

20-1403-1 Jack Risers add 4.5" to lifting capability of swing jacks



4PMB Plan View

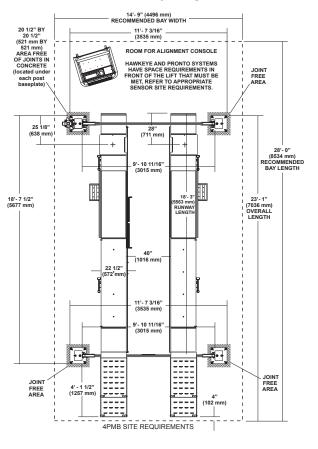

PowerSlide® Locking System



FIA with Inflation Station and PowerSlide®





www.Hunter.com Form 6129-T. 03/10

turnplate pins.